

## Wiring for Volvo 4 ISO Adapter

### Car's models :

<b>760-850-940-960 :</b>	< 1991
<b>S70/V70/C70 :</b>	1996-2000
<b>S40/V40 :</b>	1996-2000
<b>S90/V90 :</b>	1996-2000
<b>FL Series :</b>	< 1986

**Reference :** AC0000048AA


If you are interested, contact our sales department :

[sales@parrot.fr](mailto:sales@parrot.fr)

En attente d'une partie des connecteurs

### Car kit Parrot Battery

Pin Number		Couleur	Description
1		White	Mute In 1
2		Yellow	Mute In 2
3		Blue	Mute In 3
4		Orange	+ 12V Memory
5		Green	
6		Brown	
7		Red	+ 12 V Permanent
8		Black	Masse

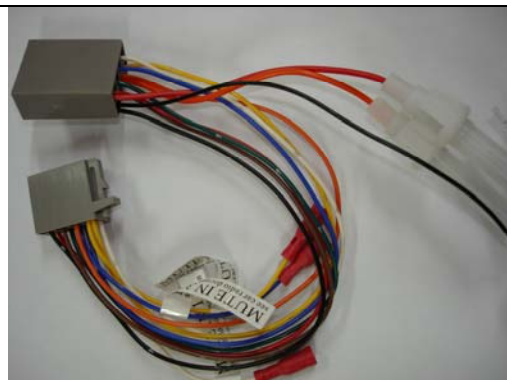

### Car kit Parrot, car's speakers

Pin Number		Couleur	Description
1		Grey	Rear right speaker +
2		White	Rear right speaker -
3		Blue	Front right speaker +
4		Green	Front right speaker -
5		Red	Front left speaker +
6		Orange	Front left speaker -
7		Bronw	Rear left speaker +
8		Black	Rear left speaker -




### Volvo Audio

N°	Connector	Color	Description
9	Volvo 1	Green	Rear left speaker +
7	Volvo 1	White	Front left speaker +
6	Volvo 2	White	Front left speaker +
6	Volvo 1	Grey	Front Right speaker +
7	Volvo 2	Grey	Front Right speaker +
2	Volvo 1	Violet	Rear Right speaker +
10	Volvo 1	Green Black	Rear Left speaker -
8	Volvo 1	White Black	Front Left speaker -
5	Volvo 2	White Black	Front Left speaker -
5	Volvo 1	Grey Black	Front Right speaker-
8	Volvo 2	Grey Black	Front Right speaker-
1	Volvo 1	Black Violet	Rear Right speaker -



**Volvo 1**

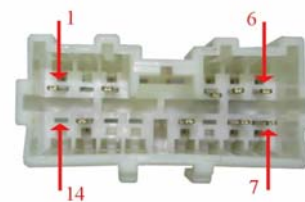

**Volvo 2**

### Volvo Supply

N°	Connector	Color	Description
3	Volvo 2	Yellow	+12 V Ignition
1	Volvo 2	Black	Ground
14	Volvo 2	Red	+12 V Permanent

### Volvo Audio

N°	Color	Description
	Green	Rear left speaker +
	White	Front left speaker +
	Grey	Front Right speaker +
	Violet	Rear Right speaker +
	Green Black	Rear Left speaker -
	White Black	Front Left speaker -
	Grey Black	Front Right speaker-
	Black Violet	Rear Right speaker -

### Volvo Supply

N°	Color	Description
	Yellow	+12 V Ignition
	Black	Ground
	Red	+12 V Permanent



### **Mounting Procedure for CK3000 Evolution**

*Same mounting procedure for CK3300, CK3500*

### **Mounting Procedure for CK3100**

*Same mounting procedure for CK3300, CK3500*

### **Mounting Procedure for CK3200 Ls Color**

*Same mounting procedure for CK3400 Ls Color*